

Paving Breakers and Chipping Hammers




Engineered to last

mac³

Chipping hammers and Pick hammers

PRECISION and EFFICIENCY for all small and medium demolition works in the construction and mining industries.

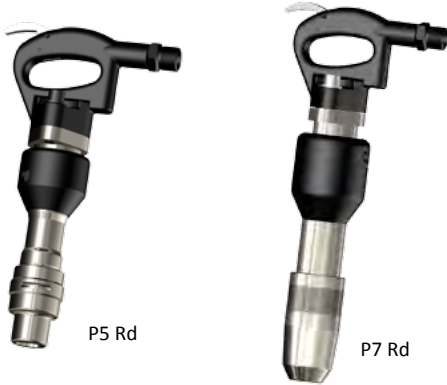

Chipping hammers

These hammers are reliable solution for applications requiring more precision, together with good impact power.

Equipped with a "D" handle, they are available either in standard version or with safety device option preventing from accidental operation of the trigger.

MAC3 chipping hammers are fitted with a safe double-threaded screw retainer or a spring retainer for quick tool changing.

Pick hammers

Designed for applications requiring higher impact energy, MAC3 pick hammers are adapted for both horizontal and vertical positions in demolition works.

Their slim design allows easy handling, even in restrained spaces.






MAC3 pick hammers are fitted with either screw retainer or latch for safe and quick tool changing.



Model	Safety device (1)	Retainer type	Weight		Length		Impact rate	Air consumption		Shank size		
			kg	lb	mm	in.		bpm	l/s	cfm	Type	mm
P5	o	screw	5	11	354	13.9	2 800	8.3	17.6	Hex	19 x 50	3/4" x 2"
P5	o	screw	5	11	354	13.9	2 800	8.3	17.6	Con	26/16 x 70	5/8" x 2 3/4"
P5	o	spring	5	11	354	13.9	2 800	8.3	17.6	Rd	17,3	.680"
P5	o	spring	5	11	354	13.9	2 800	8.3	17.6	Hex	14,7	.580"
P5	o	screw	5.1	11.3	364	14.3	2 800	8.3	17.6	Rd	17 x 60	43/64" x 2 23/64"
P5	o	screw	6.2	13.7	392	15.4	2 800	8.3	17.6	Rd	24 x 70	15/16" x 2 3/4"
P7	o	screw	7	15.5	437	17.2	2 200	10	21.2	Rd	24 x 70	15/16" x 2 3/4"
P7	o	screw	6.8	15	422	16.6	2 200	10	21.2	Rd	23 x 70	29/32" x 2 3/4"
P7	o	screw	6.8	15	422	16.6	2 200	10	21.2	RdHex	23 x 70	29/32" x 2 3/4"
P9	o	screw	8.6	19	459	18.1	2 000	16.7	35.4	Rd	23 x 70	29/32" x 2 3/4"
P9	o	screw	8.6	19	459	18.1	2 000	16.7	35.4	RdHex	23 x 70	29/32" x 2 3/4"
P9	o	spring	9	19.9	409	16.1	2 400	16	34	Rd	17,3	.680"
P9	o	spring	9	19.9	409	16.1	2 400	16	34	Hex	14,7	.580"
P9	o	screw	8.6	19	475	18.7	2 000	16.7	35.4	Rd	24 x 70	15/16" x 2 3/4"
P9	o	screw	8.6	19	475	18.7	2 000	16.7	35.4	Rd	25 x 75	1" x 3"
P9	o	screw	8.6	19	475	18.7	2 000	16.7	35.4	Rd	26 x 70	1 1/32" x 2 3/4"
P9	o	latch	9.8	21.6	494	19.4	2 000	16.7	35.4	Hex	22 x 82	7/8" x 3 1/4"
P13	o	screw	12.9	28.4	538	21.2	1 500	20	42.4	Rd	26 x 70	1 1/32" x 2 3/4"
P13	o	latch	14	30.9	590	23.2	1 600	20	42.4	Hex	22 x 82	7/8" x 3 1/4"
P13	o	latch	15.5	34.2	630	24.8	1 600	20	42.4	Hex	25 x 108	1" x 4 1/4"
P13	o	screw	12.9	28.4	548	21.6	1 500	20	42.4	Rd	24 x 70	15/16" x 2 3/4"
P13	o	screw	12.9	28.4	548	21.6	1 500	20	42.4	Rd	25 x 75	1" x 3"

● = standard ; ○ = option ; (1) = mandatory in countries requiring EC-marking

Accessories

Hammer	Type	 Moil point	 Narrow chisel	 Narrow blade	 Wide blade	 Hose coupling
P5	Hex	✓	✓	✓		✓
P5	Con	✓	✓	✓*		✓
P5	Rd	✓	✓			✓
P7	Rd	✓	✓			✓
P9	Hex	✓	✓	✓	✓	✓
P9	Rd	✓	✓			✓
P13	Hex	✓	✓	✓	✓	✓
P13	Rd	✓	✓	✓*	✓*	✓
BB	Hex	✓	✓	✓	✓	included

* = requires mounting of a specific retainer



P5 box

P5 chipping hammer
+ 1 moil point + 1 narrow chisel
+ hose coupling



Anti-freeze oil

2 L cans of anti-freeze oil
for winter conditions



Compressed Air Solutions



MAC3 is at your disposal with a large complementary offer of compressed air equipment for :

- ▶ construction site applications: **portable compressors** from 2,2 to 3,2 m³/min - 70 to 115 CFM
- ▶ sandblasting and roughcasting: 70 L **sandblaster** and **roughcasting tool**
- ▶ industrial applications: **stationary compressors** from 2 to 315 kW - 3 to 430 HP



www.mac3europe.com



Equipment complying
with EU regulation
in force.

10, Allée du Canal
F-42160 Saint Cyprien
France
tél : +33 (0)4 77 02 13 08
fax : +33 (0)4 77 02 20 28
email : contact@mac3europe.com

Distributor :